

# Outdoor PTZ Speed Domes



## Features

- 128 preset can be randomly stored
- Support 8 masking zooms at most
- Intergrated design, compact structure, easy to remove
- OSD Menu
- Rs-485 Bus Communication or American Dynamics Manchester code or coaxial video cable
- All configurable options stored in control board to protect against power cuts
- Built-in direction indicator
- Built-in temperature indicator
- Metal construction with 7 alarm input / 2 alarm output, support alarm linkage
- IP66 Weatherproof Standard
- AC24V/50w


Support Motion Tracking Function (optional)

## DSP-D82M26 / DSP-D82M30 / DSP-D82M35W / DSP-D82M36W

## Specification

Model	DSP-D82M26	DSP-D82M30	DSP-D82M35W	DSP-D82M36W
Camera	Sony EX-980 Day/Night Color 26x Zoom Camera	Hitachi Day/Night Color 30x Zoom Camera	Hitachi WDR Day/Night Color 35x Zoom Camera	Sony EX-1010 Day/Night WDR Color 36x Zoom Camera
Sync. System	Internal/External (V-Lock)	Internal/Line-Lock	Internal/Line-Lock	Internal/External (V-Lock)
Scanning Mode	2:1 Interlacing			
Definition	520TVL	520TVL	530TVL	530TVL
Minimum Illumination	Color:1.0Lux B/W: 0.001Lux	Color:0.7Lux B/W: 0.01Lux	0.01Lux	Color:0.7Lux B/W: 0.01Lux
Focus Length	26x Zoom Lens (3.5~91.0mm)	30x Zoom Lens (3.4~108mm)	35x Zoom Lens (3.4~119.0mm)	36x Zoom Lens (3.4~122.4mm)
Digital Zoom	12x	12x	12x	12x
WDR	---	---	Yes	Yes
Backlight Compensation	On/Off			
White balance	Auto, ATW, Indoor, Outdoor, One-push, Manual	Auto/manual	Auto/manual	Auto, ATW, Indoor, Outdoor, One-push, Manual
Alarm Function	7 alarm input / 2 alarm output, support alarm linkage			
AGC	Auto/Manual			
S/N Ratio	≥50dB			
Video Signal Output	1.0±0.2Vp_p			
Communication Mode	RS485/422 BUS, Manchester, BI-PHASE, Coaxial Video Control			
Communication Baudrate	2400/4800/9600/19200 bps			
Display zone	8 programmable zones with titles(support auto-scan within zones)			
Address setting	1~254			
Rotation Speed	Pan 0.4~320°/S ; Tilt 0.4~150°/S			
Pan/Tilt Rotation	Pan360°continuously; tilt 0-90°with auto-flip			
Preset	128 presets, can be labeled with editable titles			
Operation environment	Indoor -10°C ~ +60°C ; Outdoor -40°C ~ +60°C			
Environmental Humidity	0~95% no compensation			
Power Supply	AC24V±4V			
Consumption	Indoor 10W Outdoor 50W			
Protection grade	IP66, 4000V lightning-proof, surge-proof, wave-proof, all-day defend cover			
Weight	N.W. 6.5Kg G.W. 8.5Kg			

## Dimension

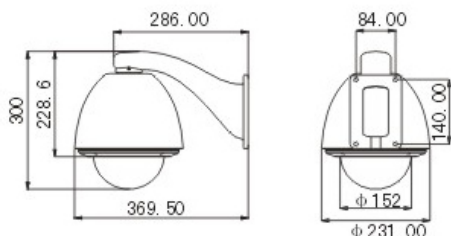

## Optional Parts



Pendant Bracket  
**PMB-D101**

Wall-Mount Bracket  
**WMB-D102**

Corner-Mount Bracket  
**CMB-D103**

Pole-Mount Bracket  
**PMB-D104**

Smoked Dome Bubble  
**SDB-D01**