

# SSV-502S / SSV-502HI / SSV-502I

Mini Color IR Dome




## Specifications

Model	SSV-502S	SSV-502HI	SSV-502I
<b>Image</b>			
Divice	1/4" Sharp CCD	1/3" High Res.Sharp CCD	1/3" Sharp CCD
Size	1/4"	1/3"	
Pixels(HxV)	NTSC: 510(H)*492(V)/ PAL: 500(H)*582(V)	NTSC:768(H) x 492(V), PAL:752(H) x 582(V)	NTSC: 510(H)*492(V)/ PAL: 500(H)*582(V)
Resolution	420 TVL	520TVL	420 TVL
<b>Min.Scene Illumination</b>			
Color	0.01 Lux @F2.0 / 0 Lux (LED ON)		
B/W	N/A		
<b>Lens</b>			
Focal Lenght	2.8mm Lens	4.0mm Board Lens	
<b>Synchronization</b>			
Sync. System	2:1 Interlace		
<b>S/N Ratio</b>			
S/N Ratio	More than 52 dB		
<b>Functions</b>			
Electronic Shutter	Auto 1/60 (50) sec. ~ 1/100,000 sec		
Auto White Balance	Atw With Mct Technology (Multi-Color Temp)		
Auto Gain Control	Full Auto		
Video Output	1.0 Vp-p Composite Video Output/Ohms		
Weatherproof	IP 66		
IR LED	24*IR-LEDs		
Illuminate Distance	20M		
Illuminator Active Limit	10 Lux.		
Gamma	0.45		
<b>Environmental</b>			
Operating Temperature	- 10°C~ + 50°C degree		
<b>Conditions</b>			
Operating Humidity	RH 85% or Less		
<b>Power</b>			
Power Supply	DC 12V / 1.5W & Total : DC 12V / 8.5W		
<b>Physical Specification</b>			
Dimensions	110mm(Dia.) x 175mm (L)		

## Feature

- Sharp CCD
- 420 / 520TVL
- 0.01 Lux @F2.0 / 0 Lux (LED ON)
- 2.8 / 4 mm Lens
- Automatic Gain Control
- Auto Electronic Shutter
- Auto White Balance
- 24x IR - LED Built - in with Max . 20 Meters of Illuminating Distance
- DC12V

## Dimension(unit:mm)

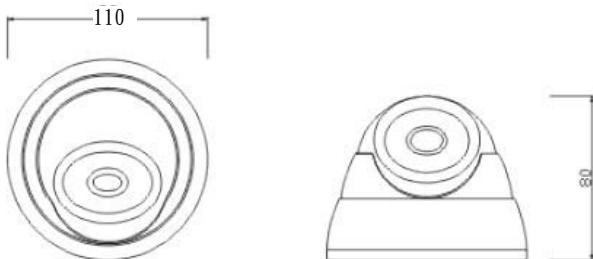

J&S United Technology Corp.  
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan  
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338  
www.jsccctv.com.tw

