

SSV-502 / SSV-502HQ

Mini Color IR Dome



Specifications




Model	SSV-502	SSV-502HQ
Image		
Divice	1/3" SONY	1/3" High Res.SONY CCD
Size	1/3"	1/3"
Pixels(HxV)	NTSC: 510(H)*492(V)/ PAL: 500(H)*582(V)	NTSC:768(H) x 492(V), PAL:752(H) x 582(V)
Resolution	420 TVL	540TVL
Min.Scene Illumination		
Color	0.01 Lux @F2.0 / 0 Lux (LED ON)	
B/W	N/A	
Lens		
Focal Lenght	4.0mm Lens	
Synchronization		
Sync. System	2:1 Interlace	
S/N Ratio		
S/N Ratio	Better than 50 dB	
Functions		
Electronic Shutter	Auto 1/60 (50) sec. ~ 1/100,000 sec	
Auto White Balance	Atw With Mct Technology (Multi-Color Temp)	
Auto Gain Control	Full Auto	
Video Output	1.0 Vp-p Composite Video Output/Ohms	
Weatherproof	IP 66	
IR LED	24*IR-LEDs	
Illuminate Distance	20M	
Illuminator Active Limit	10 Lux.	
Gamma	0.45	
Environmental		
Operating Temperature	- 10°C~ + 50°C degree	
Conditions		
Operating Humidity	RH 85% or Less	
Power		
Power Supply	DC 12V / 1.5W & Total : DC 12V / 8.5W	

Feature

- 1/3" Sony CCD
- 420/540 TVL
- 0.01Lux / F1.2 0Lux (LED ON)
- 4.0mm Board lens
- Automatic Gain Control
- Auto Electronic Shutter
- Auto White Balance
- 24x IR - LED Built - in with Max . 15 Meters of Illuminating Distance
- DC12V

Dimension(unit:mm)

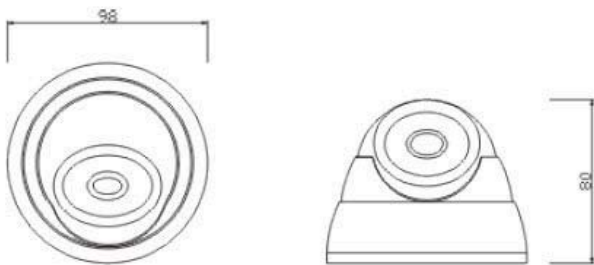

J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

