

SSV-806EX

High Res. Color OSD Dome Camera




Specifications

Model	SSV-806EX
Image	
Device	1/3" SONY CCD
Size	1/3"
Pixels(HxV)	NTSC:768(H) x 492(V)/ PAL:752(H)x 582(V)
Resolution	530 TVL
Min.Scene Illumination	
Color	0.2 Lux @F2.0
B/W	N/A
Lens	
Focal Length	3.6 mm Lens
Synchronization	
Sync. System	Internal / Line Lock
S/N Ratio	
S/N Ratio	52 dB (AGC off, Weight on)
Functions	
Electronic Shutter	Auto: 1/50(60) ~1/100,000 sec
Auto White Balance	ATW / AWB / AWC / Manual
Auto Gain Control	Auto / Manual
Digital Noise Reduciton	2D
WDR	510x normal camera(54dB)
Digital Day/Night	Auto
OSD menu	OSD control
BLC	WDR / BLC / OFF
flickless	ON / OFF
Environmental	
Operating Temperature	- 10°C~ + 50°C degree
Conditions	
Operationg Humidity	RH 80% or Less
Power	
Power Consumption	DC 12V 3W
Power Supply	DC 12V (-/+10%)
Physical Specification	
Dimensions	110mm*140mm

Feature

- 1/3" SONY CCD
- 530 TVL
- 0.2 Lux@f2.0
- Automatic Gain Control
- Auto Electronic Shutter
- Auto White Balance
- DC12V

Dimension(unit:mm)

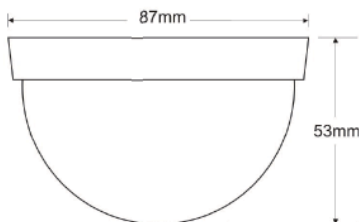

J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

