

# SSV-808EF / SSV-808EX

WDR High Res. Color 3-Axis OSD Dome




## Specifications

Model	SSV-808EF	SSV-808EX
Image		
Device	SONY 960H DS CCD	1/3" SONY CCD
Size	1/3"	
Pixels(HxV)	NTSC: 1028(H)*508(V)/ PAL: 1024(H)*596(V)	NTSC:768(H) x 492(V)/ PAL:752(H)x 582(V)
Resolution	650 TVL	530 TVL
Min. Scene Illumination		
Color	0.1 Lux @F2.0	0.2 Lux
B/W	0.01@F2.0	N/A
Lens		
Focal Length	3.6 mm Lens	
Synchronization		
Sync. System	Internal / Line Lock	
S/N Ratio		
S/N Ratio	52 dB (AGC off, Weight on)	
Functions		
Electronic Shutter	Auto: 1/50(60) ~1/100,000 sec	
Auto White Balance	ATW / AWB / AWC / Manual	
Auto Gain Control	Auto / Manual	
Digital Noise Reduciton	2D	
WDR	510x normal camera(54dB)	
Digital Day/Night	Auto	
OSD menu	OSD control	
BLC	WDR / BLC / OFF	
flickless	ON / OFF	
Environmental		
Operating Temperature	- 10°C~ + 50°C degree	
Conditions		
Operating Humidity	RH 80% or Less	
Power		
Power Consumption	DC 12V 3W	
Power Supply	DC 12V (-/+10%)	
Physical Specification		
Dimensions	110mm*140mm	

## Feature

- 1/3" Sony 960H DS CCD
- 1/3" Sony CCD
- 650 / 530 TVL
- 0.1Lux@f2.0
- Automatic Gain Control
- Auto Electronic Shutter
- Auto White Balance
- DC12V
- 3-Axis Design

## Dimension(unit:mm)

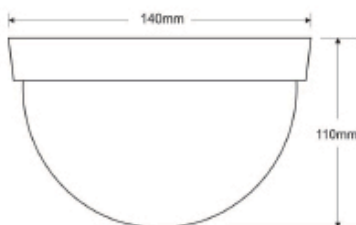

More information is available at [www.jsctv.com](http://www.jsctv.com)



J&S United Technology Corp.  
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan  
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338  
[www.jsctv.com.tw](http://www.jsctv.com.tw)

