

SSV-808S / SSV-808HI / SSV-808I

Color 3-Axis Dome Camera




3-Axis Mechanism

Feature

- 1/3" High Res.Sharp CCD
- 420 / 520TVL
- 0.5 Lux / F2.0
- High sensitivity and
- ATW With Mct Technology (Multi-Color Temp)
- Auto Gain Control
- DC12V
- 3-Axis Adjustment Design

Dimension(unit:mm)

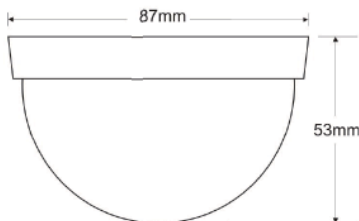

Specifications

Model	SSV-808S	SSV-808HI	SSV-808I
Image			
Divice	1/4"SHARP CCD	1/3" High Res.Sharp CCD	1/3" Sharp CCD
Size	1/4"	1/3"	
Pixels(HxV)	NTSC: 510(H) x 492(V) PAL:500(H) x 582(V)	NTSC:768(H) x 492(V) PAL:752(H) x 582(V)	NTSC: 510(H) x 492(V) PAL:500(H) x 582(V)
Resolution	420 TVL	520 TVL	420 TVL
Min.Scene Illumination			
Color	0.5Lux @F2.0		
B/W	N/A		
Lens			
Focal Length	2.8mm Lens	3.6mm Lens	
Synchronization			
Sync. System	2:1 Interlace		
S/N Ratio			
S/N Ratio	More than 48dB		
Functions			
Mechanical IR Cut Filter	400~645nm+850nm		
Electronic Shutter	Auto: 1/50(60) ~1/100,000 sec		
Auto White Balance	Auto(2500K-9500K)		
Auto Gain Control	Full Auto		
Video Output	1.0 Vp-p Composite Video Output/Ohms		
Gamma	0.45		
Environmental			
Operating Temperature	- 10°C~ + 50°C degree		
Conditions			
Operating Humidity	RH 85% or Less		
Power			
Power Consumption	90mA ±10% under DC 12V		
Power Supply	DC 12V (-/+10%)		
Physical Specification			
Dimensions	58mm*87mm		
Weight	180g		



J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

