

SSV-808 / SSV-808HQ

1/3" Color 3-Axis Dome Camera




3-Axis Mechanism

Feature

- SONY 1/3" Super HAD CCD sensor.
- 420 / 540 TVL
- 0.5 / 0.2 Lux / F1.2
- 3.6mm Lens
- High sensitivity, low smear, high antiblooming, high S/N ratio.
- ATW With Mct Technology (Multi-ColorTemp)
- Auto Gain Control
- Auto Back Light Compensation
- 2H Mode of H.V aperture correction
- DC12V
- 3-Axis Adjustment Design

Dimension(unit:mm)

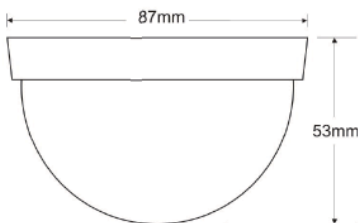

Specifications

Model	SSV-808	SSV-808HQ
Image		
Divice	1/3" SONY CCD	1/3" High Res.Sony CCD
Size	1/3"	
Pixels(HxV)	NTSC: 510(H)*492(V)/ PAL: 500(H)*582(V)	NTSC: 768(H)*492(V)/ PAL: 752(H)*582(V)
Resolution	420 TV line	540 TV line
Min.Scene Illumination		
Color	0.5 Lux @F2.0	0.2 Lux @F2.0
B/W	N/A	
Lens		
Focal Lenght	3.6mm Lens	
Synchronization		
Sync. System	2:1 Interlace	
S/N Ratio		
S/N Ratio	48 dB (AGC OFF)	
Functions		
Electronic Shutter	Auto 1/60(50)sec. ~ 20u sec.	
Auto White Balance	Atw With Mct Technology (Multi-Color Temp)	
Auto Gain Control	Full Auto	
Video Output	1.0 Vp-p Composite Video Output/Ohms	
Gamma	0.45	
Environmental		
Operating Temperature	- 10°C~ + 50°C degree	
Conditions		
Operating Humidity	RH 85% or Less	
Power		
Power Consumption	Total : DC 12V / 4.5W	
Power Supply	DC 12V (-/+10%)	
Physical Specification		
Dimensions	58mm*87mm	
Weight	180g	

More information is available at www.jsctv.com



J&S United Technology Corp.
13F-6, No. 258, Lian-Cheng Rd., Chung-Ho City, Taipei County 235, Taiwan
TEL.: +886-2-8227-2528 FAX: +886-2-8227-2338
www.jsctv.com.tw

